




DEXRON® VI AUTOMATIC TRANSMISSION FLUID

Sinclair DEXRON® VI Automatic Transmission Fluid is a high performance synthetic formula utilizing superior additive technology and premium synthetic base oils that ensure peak performance in a large variety of automatic transmissions.

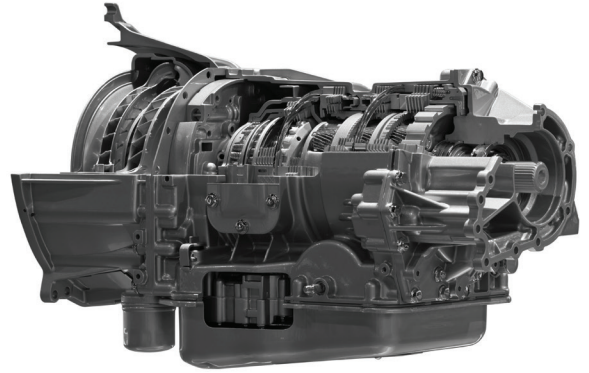

APPLICATIONS

- Recommended for use in any GM transmission.
- Designed for 2006 model year equipped with Hydra-Matic transmissions beginning with the Hydra-Matic 6L80 six-speed automatic transmission.

PERFORMANCE

- Extended fluid life
- Improved oxidation and thermal stability
- Advanced frictional properties to prevent transmission vibration and provide smooth gear shifting during low temperature operation
- Improved anti-wear protection for extended transmission life
- Outstanding low temperature performance
- Outstanding resistance against sludge and deposit formation

***Always follow manufacturer's recommendations.**



DEXRON® VI AUTOMATIC TRANSMISSION FLUID

TYPICAL PHYSICAL PROPERTIES

	METHOD	TYPICAL RESULTS
Viscosity Grade		DEXRON® VI ATF
Gravity, °API	ASTM D287	35.6
Specific Gravity @ 60°F (15.6°C)	ASTM D4052	0.8468
Viscosity @ 40°C cSt	ASTM D445	28.56
Viscosity @ 100°C cSt	ASTM D445	5.797
Viscosity Index	ASTM D2270	151
Pour Point °C (°F)	ASTM D5950	-51°C (-60°F)
Brookfield Viscosity at -40°C, cP	ASTM D2983	10300
Color	ASTM D1500	Red
Copper Strip Corrosion (3 hrs @ 100°C)	ASTM D130	0
Rust Protection	ASTM D665A	Pass
Hydrolytic Stability Test	ASTM D2619	Pass
Foam Test	ASTM D892	<100/0 ml
Sundstrand Axial Piston Pump	Sundstrand Procedure	Pass

Description	Pack Size	Part #	Each UPC	Case UPC	Case Dimensions	Case Cube / Pallet Cube	Case Weight / Pallet Weight	Pallet Stack
DEXRON®-VI ATF	55 Gallon	762-003	0 14168-01759 6	N/A	L 23.000 x W 23.000 x H 35.000	10.715 / 44.444	442.990 / 1771.960	4 Drums

DEXRON® VI IS ALSO AVAILABLE AS A BULK FLUID.

